

# Ocean 8 V4.

## Technical data.

BERRY  ALLOC

03/2023

|                     | contains | m <sup>2</sup>        | ft <sup>2</sup>         | weight  |
|---------------------|----------|-----------------------|-------------------------|---------|
| 1 pack Ocean 8 V4   | 9 planks | 2,20 m <sup>2</sup>   | 23.71 ft <sup>2</sup>   | 15,7 kg |
| 1 pallet Ocean 8 V4 | 56 packs | 123,34 m <sup>2</sup> | 1327.61 ft <sup>2</sup> | 891 kg  |



### product specifications

|                                                     |                           |
|-----------------------------------------------------|---------------------------|
| Dimensions                                          | 1288 x 190 mm             |
| Total thickness                                     | 8 mm                      |
| Bevels                                              | 4                         |
| Loc System                                          | DuoLoc                    |
| Level of use according to European standard EN10874 | 23 heavy domestic use     |
|                                                     | 32 general commercial use |
| Residential warranty                                | lifetime                  |
| Commercial warranty                                 | 5 years                   |



Warranty conditions on [www.berryalloc.com](http://www.berryalloc.com).

### composition

|               |                                                                                                  |
|---------------|--------------------------------------------------------------------------------------------------|
| Surface layer | Direct laminated paper, impregnated with melamine resin.                                         |
| Substrate     | Moisture resistant High Density Fiberboard (HDF) treated with hydro+ water repelling technology. |
| Backing       | Direct laminated paper, impregnated with melamine resin.                                         |

### test results

|                                                                 |           |                                                                                                                                                        |
|-----------------------------------------------------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Abrasion resistance                                             | EN13329   | AC4 (IP≥4000)                                                                                                                                          |
| Impact resistance                                               | EN13329   | small ball : ≥ 35 mm - big ball : ≥ 750 mm                                                                                                             |
| Thickness swelling                                              | ISO 24336 | 12 % (requirement ≤ 18 %)                                                                                                                              |
| Water resistance                                                | ISO 4760  | up to 24 hours                                                                                                                                         |
| Fire resistance                                                 | EN13501-1 | Cfl-S1                                                                                                                                                 |
| Formaldehyde emission                                           | EN717-1   | E1                                                                                                                                                     |
| Slip resistance                                                 | EN13893   | DS                                                                                                                                                     |
| Density                                                         | EN323     | 900 kg/m <sup>3</sup>                                                                                                                                  |
| Resistance to staining                                          | EN438     | 5 (groups 1+2) ; 4 (group 3)                                                                                                                           |
| Effect of a furniture leg                                       | EN16581   | no damage (foot type 0)                                                                                                                                |
| Effect of a castor chair                                        | EN425     | no damage with type W wheels                                                                                                                           |
| Thermal resistance in combination with underlay Excellence Plus | ISO 8302  | 0,08 m <sup>2</sup> K/W – Suitable for floor heating/cooling.<br>Detailed instructions on <a href="http://www.berryalloc.com">www.berryalloc.com</a> . |




lamine.

[www.berryalloc.com](http://www.berryalloc.com)

03/2023

### What is a laminate floor made of?

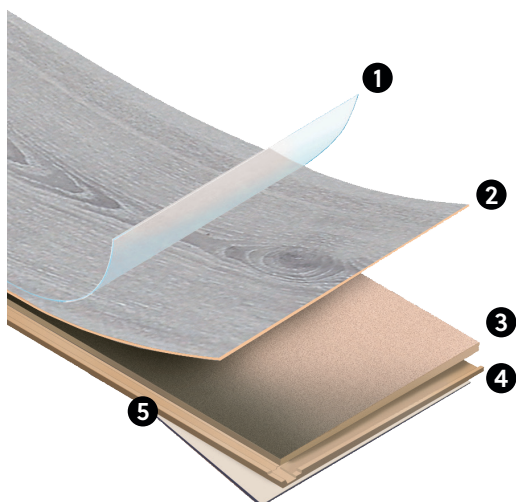

- ❶ An **overlay** that determines the strength and resistance of your floor
- ❷ A **decor paper** for the design
- ❸ A **high-density fibreboard (HDF)** core
- ❹ A **counterbalance** to stabilise and protect the HDF core
- ❺ The **hydro+** water-repellent coating\*

(\*) Only available for our Ocean+ collections